


端末Vキャップ

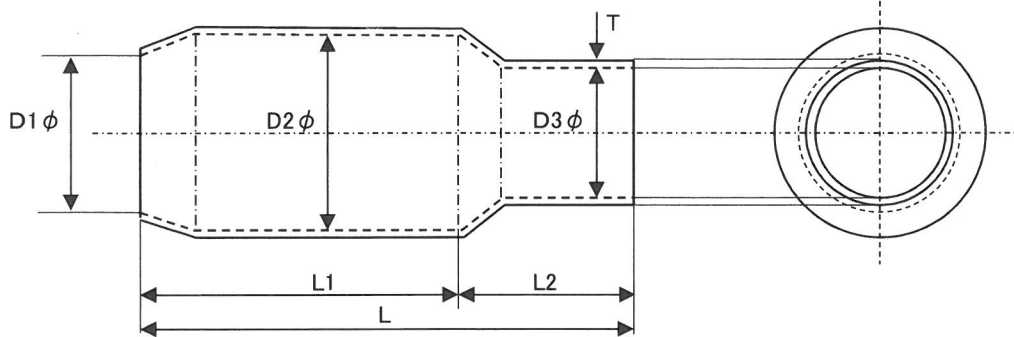

型式	$D1\phi \pm 0.5$	$D2\phi$	$D3\phi$	$L1 \pm 1.0$	$L2$	L	$T \pm 0.3$	1袋(個)
V-0.3	2.6	3.0	2.0	6.0	7.0 ± 0.5	13.0 ± 1.5	0.8	1000
V-1.25	2.8	3.3	3.1	6.0	7.0 ± 0.5	13.0 ± 1.5	0.8	1000
V-2	3.3	4.5	3.7	7.0	7.0 ± 0.5	14.0 ± 1.5	1.0	1000
V-3.5	4.2	5.7	4.3	9.0	8.0 ± 0.5	17.0 ± 1.5	1.0	1000
V-5.5	4.8	5.7	5.2	9.0	8.0 ± 0.5	17.0 ± 1.5	1.0	1000
V-8	6.2	7.2	6.2	10.0	9.0 ± 0.5	19.0 ± 1.5	1.0	1000
V-14	7.5	10.0	8.0	14.0	10.0 ± 1.0	24.0 ± 2.0	1.1	100
V-22	10.5	12.0	9.5	15.0	14.0 ± 1.0	29.0 ± 2.0	1.2	100
V-38	12.5	14.0	11.8	17.5	16.5 ± 1.0	34.0 ± 2.0	1.5	100
V-60	15.0	16.8	13.5	20.0	19.0 ± 1.0	39.0 ± 2.0	1.5	100
V-80	17.0	19.0	16.0	25.0	22.0 ± 1.0	47.0 ± 2.0	1.6	100
V-100	19.0	22.0	18.0	30.0	24.0 ± 1.0	54.0 ± 2.0	1.7	50
V-125	21.0	24.0	20.0	32.0	25.0 ± 1.0	57.0 ± 2.0	1.8	50
V-150	23.0	24.5	22.0	35.0	30.0 ± 1.0	65.0 ± 2.0	2.0	25
V-200	27.0	32.0	24.0	35.0	30.0 ± 1.0	65.0 ± 2.0	2.0	20
V-200L	27.0	32.0	26.0	34.0	33.0 ± 1.0	67.0 ± 2.0	2.0	20
V-250	29.0	38.0	26.5	35.0	42.0 ± 1.0	77.0 ± 2.0	2.5	20
V-325	29.0	38.0	29.0	38.0	40.0 ± 1.0	78.0 ± 2.0	2.5	20
V-325N	35.0	38.0	29.0	42.0	35.0 ± 1.0	77.0 ± 2.0	2.5	20
V-325L	35.0	38.0	32.0	42.0	34.0 ± 1.0	76.0 ± 2.0	2.5	20